



3'6" x 22'8" = 79.3 Sq/Ft

HomeGoods

SPECIFICATIONS FOR FABRICATION AND INSTALLATION:

- Internally illuminated front-lit channel letters built to UL specifications
 - Aluminum construction: backs .063 / returns .040 / depth 5"
 - Mounting method: Individual (remote power supply/wiring)
 - Power Supply(s) mounting placement: above or below roof line
 - Illumination: LED Modules
 - Primary electrical requirement: 120 volt
 - *(Installed within six feet of sign by others, with no obstructions)
- COLOR & LED SPECIFICATIONS**
- Trim Cap: Jewelrite Standard Black 1"
 - Plex Face Color: #2793 Red 3/16"
 - LED Type: Sloan Prism Red LED Modules
 - Power Supply(s) (60 Watt) (120 Volt)
 - Returns: Pre-painted Black Channel Coil
 - Interior painted for increased illumination: Gloss White

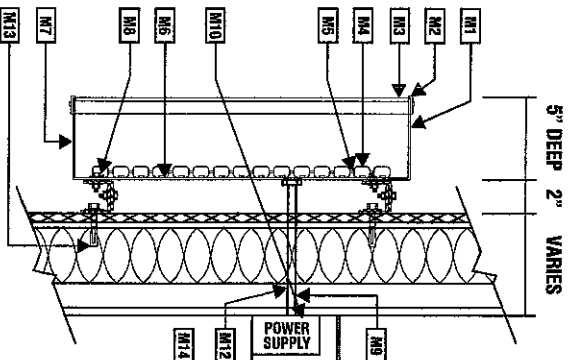

"This sign is intended to be installed in accordance with the requirements of Article 600 of the National Electric Code and other applicable local codes. This includes proper grounding and bonding of the sign."

"The location of the disconnect switch after installation shall comply with Article 600.6A1 of the National Electric Code"

- M1** .040 ALUMINUM RETURNS: EXTERIOR FINISH TO BE BLACK. .063 ALUMINUM BACKS HELD-WELED TO RETURNS WITH CONTINUOUS CAULK @ INSIDE SEAM. LETTER INTERIORS TO BE SPRAY-PAINTED GLOSS WHITE
- M2** 1" WIDE BLACK TRIM/CAPE MATERIAL
- M3** 3/16" THICK #2793 RED TRANSLUCENT ACRYLIC PLASTIC LETTER FACES
- M4** RED LED STRIPS (6 LED'S PER FOOT @ 4 1/2" ON CENTER (NO LESS THAN 2 1/2" FROM RETURN EDGES)
- M5** INTER-CONNECT CABLES BETWEEN LED MODULES
- M6** SLOAN PRISM LEDS TO BE MOUNTED TO INSIDE BACKS OF CHANNEL LETTERS WITH 3/8" VIAL TYPE AND TO BE MECHANICALLY FASTENED WITH RIVETS AT THE BEGINNING AND END OF EACH STRIP EVERY 18" ON CENTER
- M7** 1/4" WEEP HOLES AS REQUIRED IN LOWEST SPOT OF LETTERS (NO WEEP HOLES FOR INTERIOR SMALL/STORE SIGNS)
- M8** 2" (X) 2" (Y) 3/16" GALVANIZED STEEL CLIPS WITH MOUNTING HARDWARE (TYPE DEPENDING UPON WALL CONSTRUCTION MATERIALS)
- M9** 1/2" DIAMETER BOLT CONDUIT AND CONNECTORS WITH WATER-TIGHT CAULK
- M10** (120 VOLT) LED (60 WATT) POWER SUPPLIES (REMOVELY LOCATED ON LETTERS 5'-0" TALL AND SMALLER) SELF-CONTAINED OVER 5'-0" TALL (QUANTITY TO BE DETERMINED BY SIZE)
- M11** (20 AMP) (120 VOLT) POWER DISCONNECT SWITCH ON OUTSIDE OF LETTERS
- M12** PRIMARY ELECTRICAL LEADS. POWER TO LETTERS TO BE SUPPLIED BY OTHERS
- M13** 1/4" DIAMETER TOGGLE BOLT ATTACHMENTS (MINIMUM FOUR (4) PER LETTER)
- M14** RACEWAY BEHIND WALL HOUSES POWER SUPPLY(S) WITH DISCONNECT SWITCH



Project:
HomeGoods
125 Danbury Rd
Coppes Hill Plaza
Ridgefield CT 06877

Date:
11/2/2020

Drawn By:
Salesman:

Customer Approval/Signature:

SCALE: NTS

SHRINE DRAWING E-42359

UL

© COPYRIGHT 2020

This sign is intended to be installed in accordance with the requirements of Article 600 of the NEC and/or other applicable local codes. This includes proper grounding and bonding of the sign.

The location of the disconnect switch after installation shall comply with Article 600.6(A)(1) of the NEC.

This design and engineering is to remain the exclusive property of American Sign Inc. Submitted for your personal use under the agreement that the use of this design in its entirety or any part will not be reproduced, copied, lent, or used for any purpose without written consent from American Sign Inc.